



SIOEN

COATING DISTRIBUTION

BLOCKOUT 

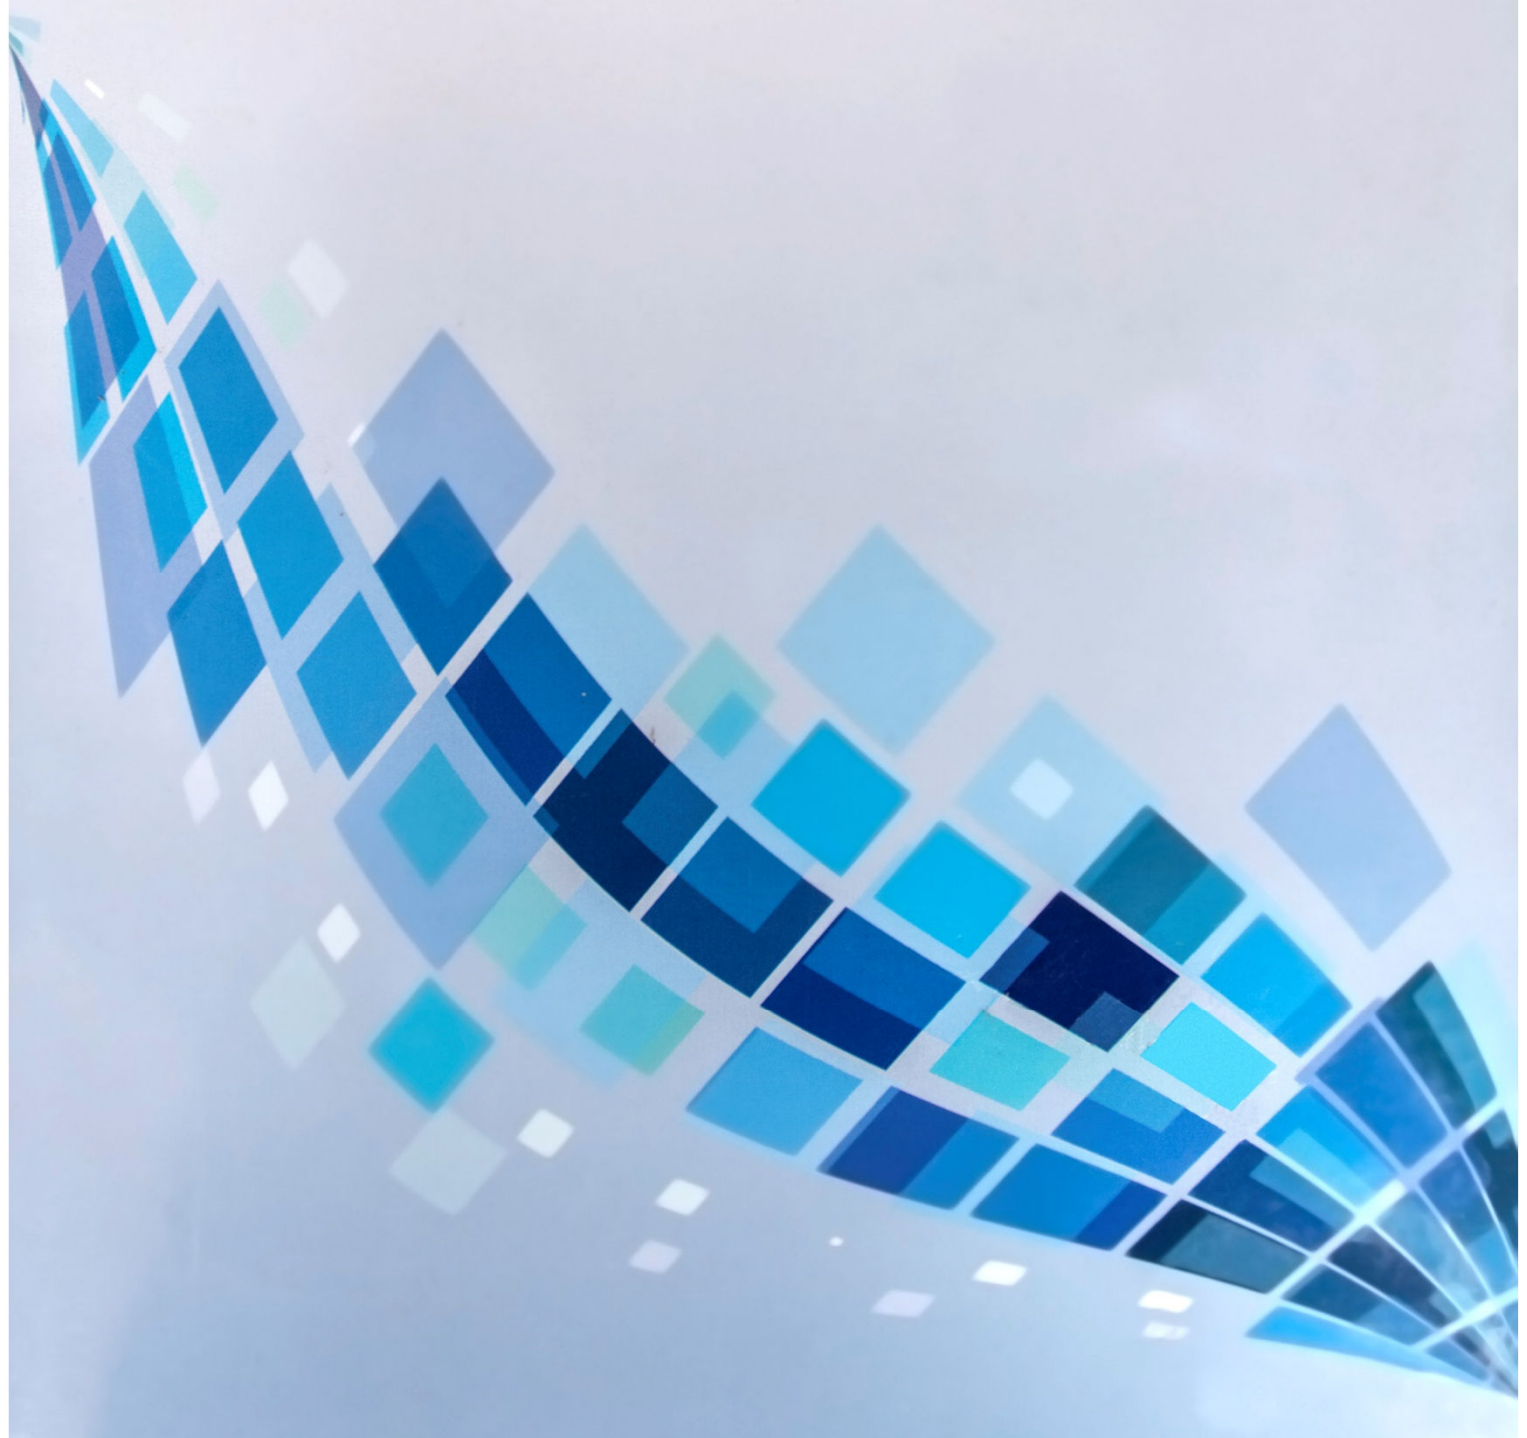

B 8118 / 7500

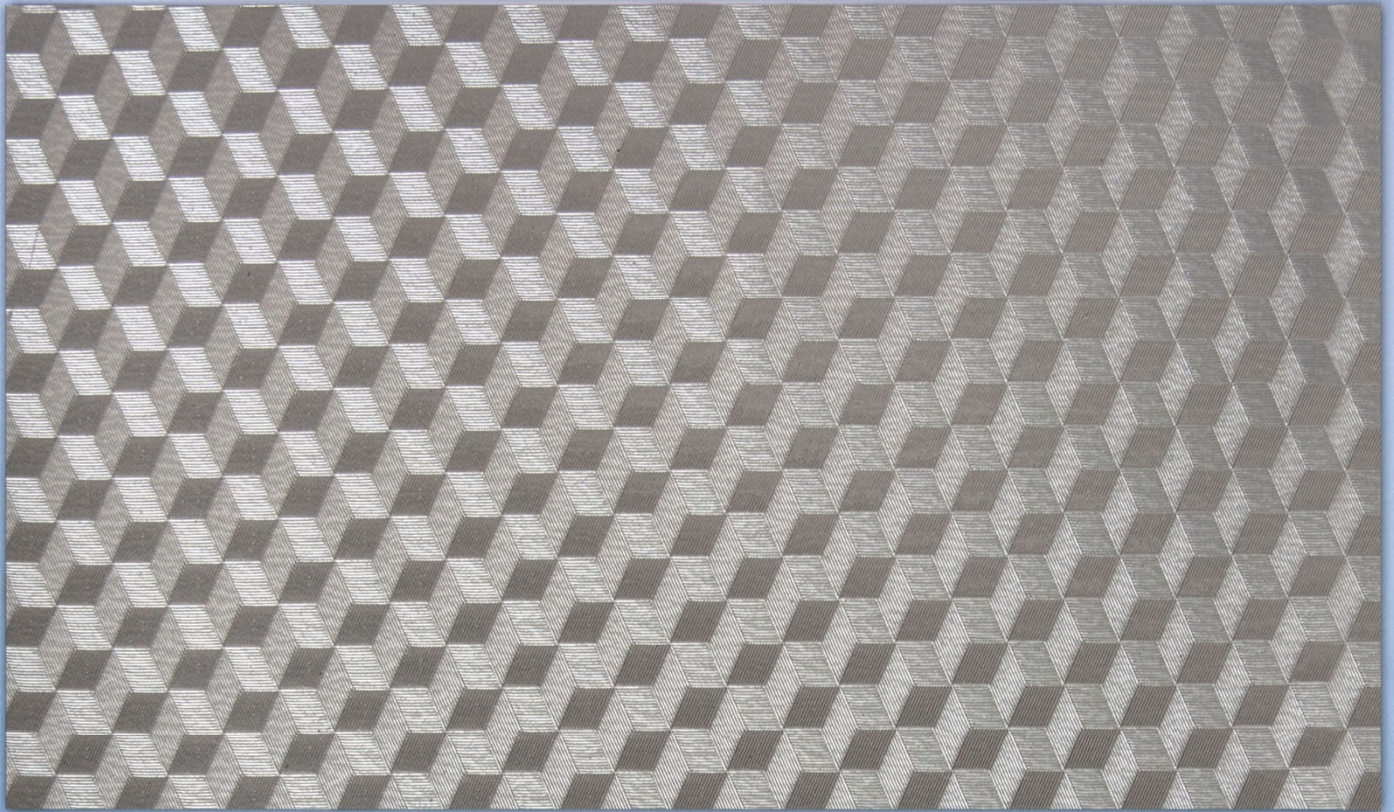

B 8118 / 1622



B 8118 / 9002



B 8118 / 7024


SIOEN

COATING DISTRIBUTION


BLACKOUT-ME



B 8118 / 3017

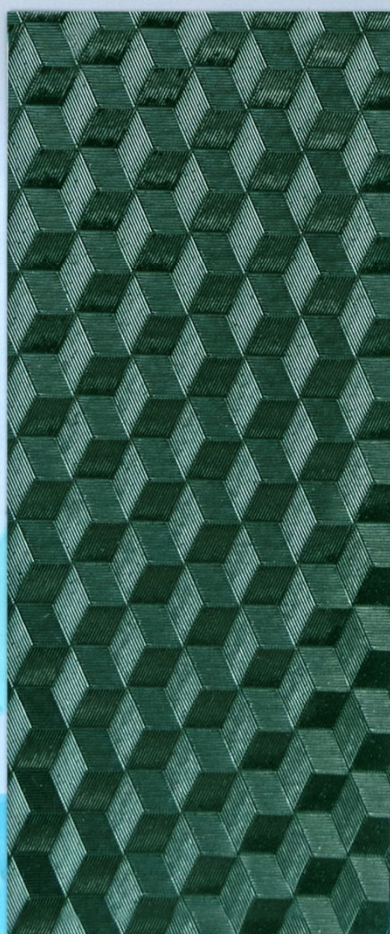

B 8118 / 6028

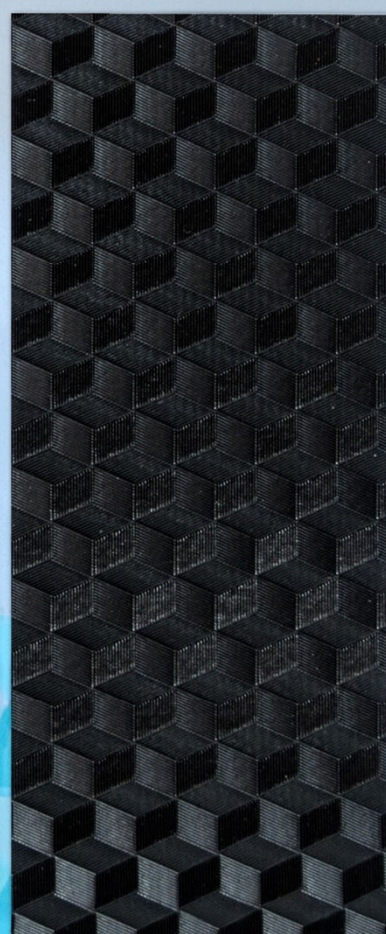

B 8118 / 7999


B 8116 / 9002

B 8116 / 1622



SIOEN
COATING DISTRIBUTION
BLOCKOUT^{MS}

GECEFTICEERD
ISO 9001
QUALITY
SYTEM
CERTIFIED

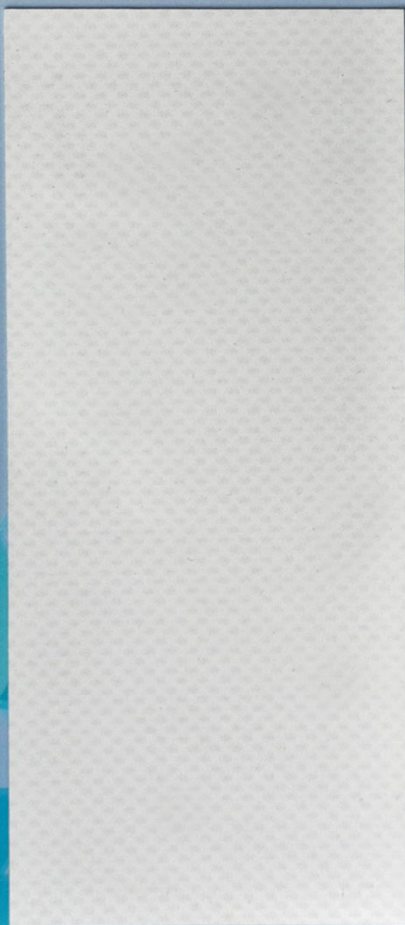

B 8290 / 7024

B 8290 / 9002

B 8290 / 1622

SIOEN

COATING DISTRIBUTION



Fabric	100% PES/1100 dtex	
Total weight	850 g/m ²	DIN EN ISO 2286/2 1998
Characteristics	ABUV / SOP	
Lacquering	1/1	
Embossing	LIN	
Breaking strength Warp	2500 N/5cm	EN ISO 1421/1 1998
Beaking strength Weft	2300 N/5cm	EN ISO 1421/1 1998
Tear strength Warp	250 N	DIN 53363 2003
Tear strength Weft	200 N	DIN 53363 2003
Adhesion	100 N/5cm	EN ISO 2411 2000
Temperature resistance	-30/+70°C	DIN EN 1876/2 1998
Light Fastness	7 - 8	ISO 105 B02 1988
Fire behavior	M2	NF P 92 507 2004

SIOEN

COATING DISTRIBUTION

BLOCKOUT M2

